CRAFTED IN BRITAIN


# Duporth Hi-Lo Assisted Bath Technical Information & Pre-Install Check Sheet

T: 01726 438694

E: sales@protecbaths.com

CRAFTED IN BRITAIN

#### **Bath Sizing**

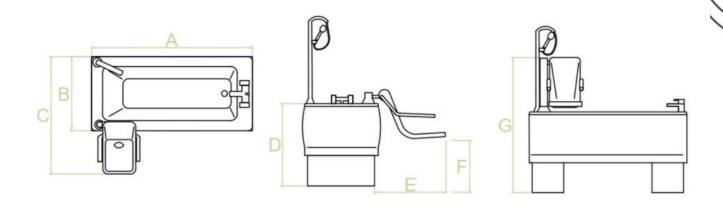

#### Bath Specification: (mm)

A:	Bath Length			
B:	Bath Width			
C.	Datle Wieltle			

C: Bath Width with Seat Extended

D: Bath Height

E: Width of Seat when fully ExtendedF: Height of Seat when fully LoweredG: Height of Top of Seat when Fully

Raised

#### Bath Sizes:

1	2	3	4	5
1500	1600	1700	1700	1800
700	700	700	750	800
1400	1400	1400	1450	1500

700-1000

700

430

1345

Max Load for all sizes:

21st / 130kg

Please Note: When deciding on the position of the Bath, there are several points that should considered.

- 1. Service/cleaning access
- 2. Clearance between door and Bath
- 3. Hoist/wheelchair access
- 4. Under floor pipe work and Cabling


Tel. 01726 438694 Email. sales@protecbaths.com

#### CRAFTED IN BRITAIN

#### **Service Requirements**

- 1. Adequate 15mm Hot and Cold Feeds coming out the wall floor at tap end of the bath at least 50mm from the wall.
- 2. 40mm waste coming out of the wall at least 50mm from the wall.
- 3. (if the feeds come up through the floor, these will need to be as above)
- 4. A IP65 rated 5amp fuse spur fitted to wall at the tap end of the Bath. Such Electrical wiring and equipment will need to conform to current electrical safety standards.
- 5. 13amp RCD/trip switch fitted outside of bathroom in easy access.

## It is important that the installer is made aware of the location of the mains electric on arrival.

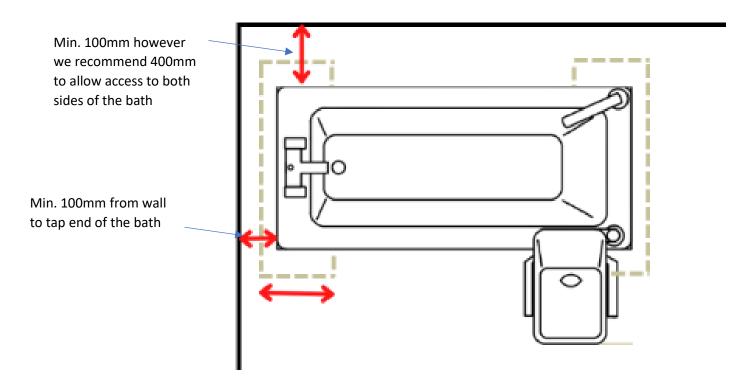

The floor directly under the bath located in the **yellow hatched area** must be sound, solid and even.

Floor will be drilled to a maximum of 100mm for fixing purposes.

CRAFTED IN BRITAIN

## Protec Duporth Hi-Lo Bath Pre-Installation Check Sheet

This sheet must be completed and returned prior to installation

Plumbing				
Ensure that the hot and cold pipes are at the Correct position				
and that the pressure is set To 1.5 Bar.				
(If less, please make us aware)				
If there an Operational TMV3 Valve on the current pipework?				
Electrics				
Electric brought into Bathroom and IP rated fused spur should be				
fitted to wall in correct location following current electrical safety standards				
Floor				
The floor is finished to standard suitable for the				
Equipment fitted.				
Completed By				
Signed By				
Date:				